

User Guide

Neo-10Uni

Ultra-Compact 30W PD Power Bank with USB-C / Lightning Ports & Bidirectional Cable

Introduction

Introducing Neo-10Uni, the ultimate power solution for your on-the-go lifestyle. With its powerful 10000mAh lithium-ion internal battery, housed in a sleek and compact form-factor, Neo-10Uni provides abundant portable power whenever your device needs it. Featuring 3 separate charging outputs, you can charge 3 devices simultaneously, while its multiple input methods including 2 USB-C inputs and a Lightning input with 22.5W power delivery make recharging a breeze. Experience lightning-fast charging from any of the 3 outputs including USB-C with 30W power delivery using your smartphone/device's included Type-C to C cable or via the included double-ended, two-way (USB-C / Lightning) cable which can also be neatly stowed in the power bank when not in use. Stylishly crafted from fireproof PC + ABS materials, Neo-10Uni ensures durability and safety with its multi-protect safety system, guarding against over-voltage, short-circuit, over-current, and over-heating, and is equipped with a smart chip for added protection. Stay connected and powered up wherever you go with Neo-10Uni.

Packaging Contents

- Neo-10Uni
- Bidirectional USB-C to Lightning Cable
- User guide

Specifications

- Battery Capacity : 10.000mAh, 37Wh
- Battery Type: Lithium-Ion
- USB-C Port Input : 5V/3.0A, 9V/2.5A, 12V/1.8A, 15V/1.5A (PD 22.5W)
- USB-C Port Output : 5V/3.0A, 9V/3.0A, 12V/2.5A, 15V/2.0A (PD 30W)
 - PPS : 3.3V-10.0V/3.0A (QC2.0/3.0, AFC & FCP)
- USB-C Cable Input : 5V/3.0A, 9V/2.5A, 12V/1.8A, 15V/1.5A (PD 22.5W)
- USB-C Cable Output : 5V/2.4A, 9V/3.0A, 12V/2.5A, 15V/2.0A (PD 30W)
 - PPS : 3.3V-10.0V/3.0A
- Lightning Cable Input : 5V/3.0A, 9V/2.5A, 12V/1.8A, 15V/1.5A (PD 22.5W)
- Lightning Cable Output : 5V/2.4A, 9V/3.0A (PD 27W)

- Total Output: 30W
- Cable Length: 18.5cm

Features

- **Large Battery Capacity:** Neo-10Uni boasts a powerful 10000mAh lithium-ion battery capacity, so you can keep your devices charged up, anywhere, anytime, delivering uninterrupted power for extended periods.
- **Efficient Triple-Device Charging:** Streamline your charging experience by simultaneously powering up to three devices, maximizing productivity on the go.
- **Double-Ended Reversible Cable:** Seamlessly connect your devices with a dual-ended cable, featuring Type-C and Lightning connectors, ensuring universal compatibility and ease of use.
- **Multiple Input Options:** Enjoy seamless compatibility with various input methods, including USB-C port, USB-C cable, and Lightning cable, catering to diverse charging needs.
- **Multiple Output Options:** Experience unparalleled adaptability with a Neo-10Uni's output system, dynamically allocating power through a USB-C port and USB-C cable with 30W delivery, and Lightning cable with 27W delivery. Whether charging high-demand devices or optimizing efficiency, Neo-10Uni ensures optimal power distribution tailored to your needs.
- **Flexible Recharging Options:** Optimize convenience with dual recharging pathways, facilitating replenishment via either the USB-C port or the included double-ended cable.
- **Durably-Made:** Engineered from fireproof PC + ABS materials, it embodies resilience and longevity, safeguarding your devices with unwavering reliability.
- **Multi-Protection System:** Neo-10Uni Prioritizes device safety with a comprehensive multi-protect system, shielding against over-voltage, short-circuit, over-current, and over-heating, in addition to the added smart chip for extra safety.
- **Premium Design:** Immerse yourself in the epitome of sophistication with Neo-10Uni's premium design, seamlessly blending sleek aesthetics with cutting-edge functionality for a truly elevated charging experience.

- **Smart LED Screen:** Featuring an LED screen that will keep you informed on the charge left on your Neo-10Uni power bank.


- **Enhanced Portability:** Lightweight and portable enough to put in your pocket, place in your bag, and use on the go.

Precautions

Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products.

1. Do not disassemble the product or attempt to fix it.
2. Do not attempt to replace any part of this product or the battery inside.
3. Do not crush, puncture, dispose of in fire, short the contacts or expose the product to water or other liquids.
4. Do not store or use the product in a high-temperature environment, including intense sunlight or heat.
5. Avoid drops, bumps, abrasions, and impacts.
6. If there is any reason to believe that there is damage to the product, discontinue use immediately.
7. If you find that the product is too hot, is emitting an odor, is deformed, punctured, or exhibits any suspicious or abnormal behavior, discontinue use immediately and contact our customer service.

Appearance & Interface Description

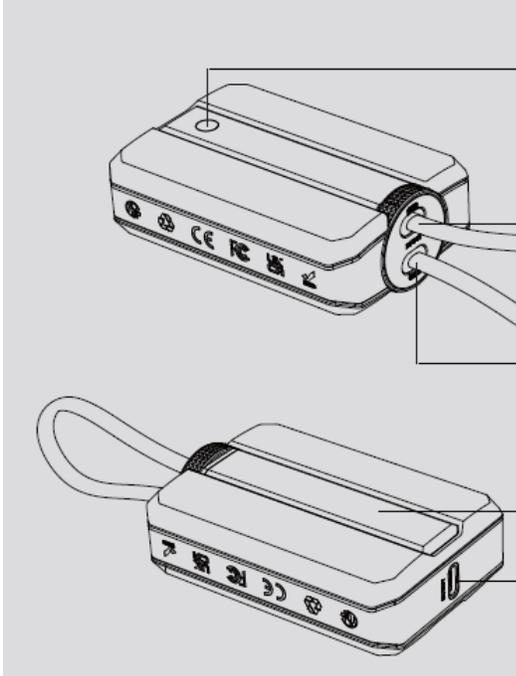

1. Power Button
2. Lightning Input/Output Port
3. USB-C Input/Output Port
4. LED Battery Display
5. USB-C Input/Output Port

Operation Instructions:

- 1. Checking the remaining power left in the Neo-10-Uni backup battery.**
 - To view the remaining power, press the power button once and view the LED Battery Level Display
- 2. Charging Neo-10Uni backup battery**
 - Connect one end of your charging Cable to any of Neo-10Uni's USB-C or Lightning Port and the other end to a desktop/laptop or a USB Power Adapter.
 - Current battery level will be displayed on the LED Battery Display.
- 3. Charging devices using Neo-10Uni**
 - Plug the included USB cable into the USB-C or Lightning output port on Neo-10Uni and the other end into the device, charging will start automatically.