

User Guide

RoverPack

4-in-1 Charging Station with MagSafe Compatible Wireless Charging Power Bank, AirPods Charger & Detachable Apple Watch Charger

Introduction

RoverPack is a unique charging station with a detachable 10000mAh power bank, so you can unlock the full potential of your various devices. Engineered to tackle your charging issues with dedicated charging modules for your iPhone, Apple Watch, and AirPods/AirPods Pro, plus a USB smart charging port and the detachable power bank with a 20W USB-C Power Delivery port and a 22.5W QC 3.0 USB port, RoverPack is the ideal charging solution for your everyday devices. Wirelessly charge your latest iPhone by simply placing them on the MagSafe compatible charging module, which also functions as a detachable power bank for On the Go charging. Revolutionize the way you charge with RoverPack.

Packaging Contents

- RoverPack
- USB-C Charging Cable
- User Guide

Specifications

- Battery Capacity: 10000mAh
- Battery Type: Li-Polymer
- Charging Station
 - Input: 5V/3A, 9V/2A, 9V/2.22A, 9V/3A
 - Output:
 - USB-A Output: 5W
 - Pogo Pin Output: 9V/2A
 - Wireless Charger Output (AirPods): 5W
 - Wireless Charger Output (Watch): 2W
 - Wireless Charger Output (Pass-Through Charging): 10W
 - Total Output: 5V/3A
- Power Bank
 - Input: 5V/2.5A, 9V/2A, 12V/1.5A (18W)
 - Output:
 - USB-A Output: 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A (22.5W) QC 3.0
 - USB-C Output: 5V/2.4A, 9V/2.22A, 12V/1.5A (20W) PD
 - Wireless Output: 5W/7.5W/10W/15W
 - Total Output: 5V/3A (15W)
- Wireless Charging Efficiency: >60% (Watch) >65% (Phone)
- Wireless Charging frequency: 110kHz-205kHz
- Wireless Charging Distance: 3-5mm
- RF Output Power: <=20dBm

Features

- **4-in-1 Charging Station:** Featuring dedicated charging modules for your iPhone, Apple Watch, and AirPods/AirPods Pro, plus a USB smart charging port and the detachable power bank with a 20W USB-C PD port and a 22.5W QC 3.0 USB port, RoverPack is the ideal charging solution for your everyday devices.
- **15W MagSafe Compatible Charger:** RoverPack wirelessly charges your latest iPhone and other compatible devices when you place them on the MagSafe compatible charging module, which also functions as a detachable power bank.
- **2W Apple Watch Charger:** The 2W detachable magnetic wireless charging pad provides quick magnetic alignment and fast charging for your Apple Watches.
- **AirPods Wireless Charger:** Charge your Apple AirPods via the 5W wireless charging pad on the base of the stand.
- **Smart Charging USB Port:** Charge your USB devices at faster speeds with the smart-charging 5W output USB port.
- **Detachable 10000mAh Power Bank:** RoverPack has a powerful 10000mAh li-polymer backup battery, that is detachable, so you can keep your devices powered up, anywhere, anytime.
- **Foldable Kickstand:** This power bank has a foldable kickstand at the back, that converts to a portable charging dock to offer stable charging as well enhanced portability.
- **20W USB-C Power Delivery:** The detachable power bank of the RoverPack has a USB-C input/output port that offers 20W Power Delivery output.
- **Quick Charge 3.0:** This ultra-fast power bank also boasts a USB Quick Charge 3.0 port that provides 22.5W ultimate fast charge for compatible devices.
- **Pass-Through Charging:** This power bank can be recharged through the USB-C port and also supports simultaneous pass-through charging to your connected devices.
- **Unique Design:** The unique and stylish design of the charging station aligns perfectly with your devices and adds a touch of style to your desk space. The detachable power bank is compact enough to be easily portable.


- **Multi-Protect System:** This charging station has a built-in multi-protect safety system with high-temperature, over-current, and over-charging protection.


Precautions

Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products.

1. Do not disassemble the backup battery or attempt to fix it.
2. Kindly use the original charging cable provided to charge the product.
3. Do not attempt to replace any part of this Backup battery or battery inside.
4. Do not crush, puncture, dispose of in fire, short the contacts or expose the battery to water or other liquids.
5. Do not connect input and output in reverse.
6. Do not store or use the battery in a high-temperature environment, including intense sunlight or heat.
7. Avoid drops, bumps, abrasions, and impacts.
8. If there is any reason to believe that there is damage to the battery, discontinue use immediately.
9. If you find that the battery is too hot, is emitting an odor, is deformed, punctured, or exhibits any suspicious or abnormal behavior, discontinue use immediately and contact our customer service.
10. Always charge this product before extended storage.

Appearance & Interface Description

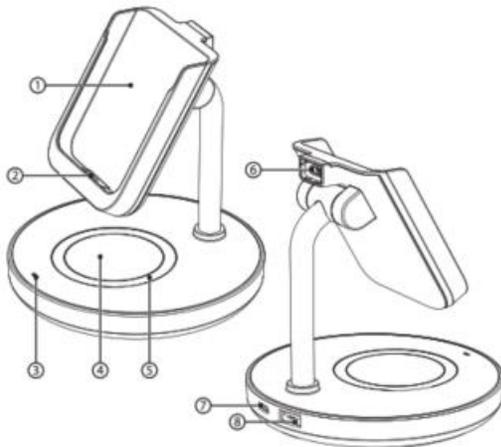

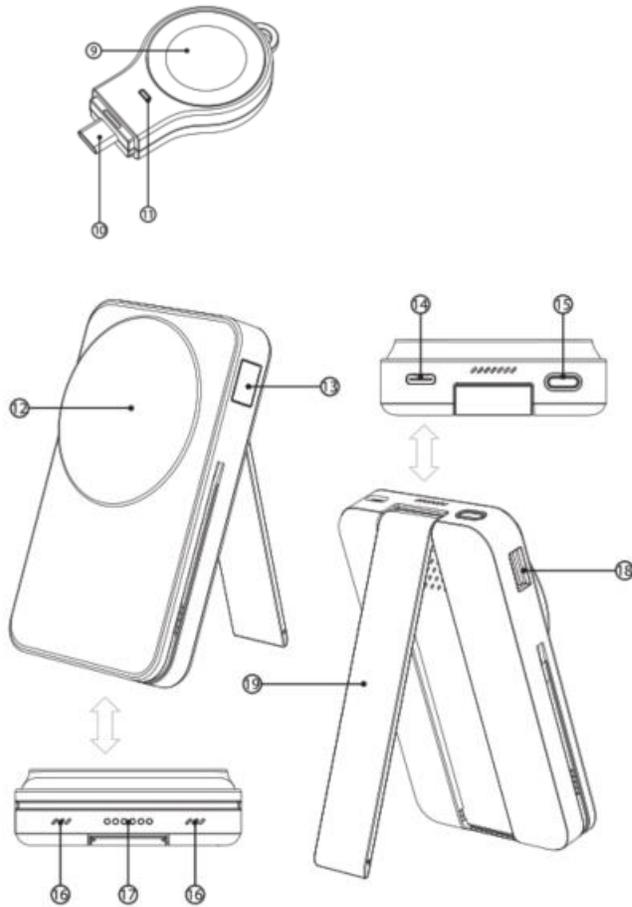

1. Docking area for power bank
2. Pogo Pins
3. LED Indicator (Charging Dock)
4. Wireless Charging area for Qi-enabled device/ TWS
5. Non-slip mat
6. Wireless charger Slot for Apple Watch
7. USB-C Input
8. USB-A Output
9. Wireless Charging Area for Apple Watch
10. USB-C Input (Connect to Charging Dock)
11. Watch Charging Indicator
12. Magnetic Wireless charging Area (Power Bank)
13. LED Display (Power Bank)
14. USB-C input/output (Power Bank)
15. Power Button (Power Bank)

16. Air Vents(Power Bank)
17. Pogo Pins contacts (Power Bank)
18. USB-A Output (Power Bank)
19. Adjustable stand (Power Bank)

Operation Instructions

I. Charging Dock

1. Powering RoverPack Charging Stand

- Connect the USB-C cable to RoverPack Charging stand to power the device.

2. Charging USB chargeable devices using RoverPack


- Plug the USB cable into the USB-A output port on RoverPack and the other end into the device. Make sure RoverPack is powered using USB-C

3. Charging Power Bank using the dock

- Connect the power source to the charging dock via the USB-C port.
- Slot in the power bank in the charging dock
- Make sure the contact pins on the power bank is facing the Pogo Pins of the charging dock.
- Power Bank will charge automatically.

4. Charging for Wireless Magnetic Charging Phone

- Please place the magnetic charging compatible device as shown below, it will charge automatically.

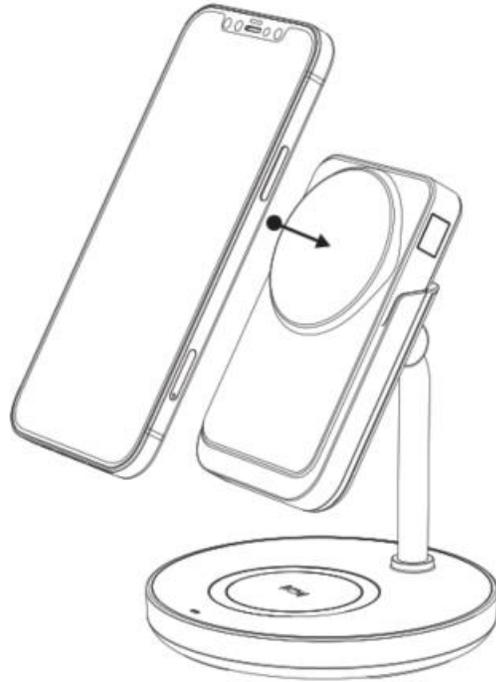

Note: *If the power bank and phone are charged simultaneously, fast charging will be activated for the phone while the power bank will be in slow charging mode. When the phone is fully charged the power bank will enter fast charging mode.*

5. Wireless Charging for Apple Watch

- Insert the Apple watch charger into the designated slot of the charging dock.
- Place your Apple watch on the charging bed.
- Apple watch will charge automatically.

6. Wireless charging for TWS earphones

- Place your wireless charging TWS or Smartphone in the charging area.
- The device will charge automatically.

II. Power Bank mode operation

1. Charging Power bank

- Connect one end of the USB-C Cable to the power bank and the other end to a desktop/laptop or a USB Power Adapter.
- LED Display will show the charging status.

2. Charging Qi-enabled devices using the Wireless Charger

- Please press the power button to turn on the power bank.
- Place your Qi-enabled device on the Wireless Charging Area ensuring your device is properly aligned with the charging coil.

3. Charging USB chargeable devices using the power bank

- Plug the USB cable into the USB-A/USB-C output port on the power bank and the other end into the device.

III. LED Indicators

1. Digital Display (Power Bank)

- The Battery Capacity will be displayed on the LED Screen

2. Charging Dock LED indicators

- RED Light On – Standby mode
- Green Light On – Charging mode / Device fully Charged.
- Flashing Red and Green Light – FOD / Error

3. Watch charging indicator.

- Green Light On – Standby mode
- Green Light breathing – Charging mode.