

# User Guide

## **PowerPack-Fold**

5-in-1 Foldable MagSafe Compatible Wireless Charging Power Bank

## Introduction

Streamline your charging process with state-of-the-art technology as PowerPack-Fold is the ideal charging solution for your daily devices. Headlining dedicated charging modules for your iPhone, Apple Watch, and AirPods/AirPods Pro in a stunning and unique foldable design, plus a 20W USB-C PD port and an 18W QC 3.0 USB port, this 10000mAh power bank that doubles as a charging stand is revolutionary. PowerPack-Fold can be recharged through the micro-USB port or the USB-C input/output port and supports simultaneous pass-through charging to your connected devices. Now you can conveniently use the same cable to charge your phone and battery pack. Portable, aesthetically inspired design with multi-device ultra-fast charging complements any space while providing you with a convenient power supply for your everyday devices, on the go.

## Packaging Contents

- PowerPack-Fold
- USB-C Charging Cable
- User Guide

## Specifications

- Battery Capacity: 10000mAh
- Battery Type: Li-Polymer
- Input
  - Micro USB Input: 5V/2A, 9V/2A
  - USB-C Input: 5V/2.6A, 9V/2A
- Output
  - USB-C Output: 5V/2.4A, 9V/2.22A, 12V/1.67A
  - USB-A Output: 5V/3A, 9V/2A, 12V/1.5A
  - Wireless Charging Output (Phone): 5W, 7.5W, 10W, 15W
  - Wireless Charging Output (Watch): 2W
  - Wireless Charging Output (Air pods): 5W
- Wireless Charging Efficiency:  $\geq 65\%$
- Wireless Charging Frequency: 110kHz-205kHz
- Wireless Charging Distance:  $\leq 6\text{mm}$
- Total Output: 5V/3A
- RF Output Power:  $\leq 20\text{dBm}$

## Features


- **5-in-1 Charging Solution:** Boasting dedicated charging modules for your iPhone, Apple Watch, and AirPods/AirPods Pro, plus a 20W USB-C PD port and an 18W QC 3.0 USB port, the PowerPack-Fold is the ideal charging solution for your everyday devices.
- **Powerful Backup Battery:** PowerPack-Fold has a powerful 10000mAh li-polymer backup battery, so you can keep your devices powered up, anywhere, anytime.
- **Foldable Design:** This power bank has a foldable design that converts to a charging station to offer stable multi-device charging as well as maintains its lightweight form factor for enhanced portability.
- **15W MagSafe Compatible Charger:** Wirelessly charges your latest iPhone and other compatible devices by simply placing them on the charging module.
- **2W Apple Watch Charger:** The 2W magnetic wireless charging pad provides quick magnetic alignment and fast charging for your Apple Watches.
- **AirPods Wireless Charger:** Charge your Apple AirPods via the 5W wireless charging pad.
- **Quick Charge 3.0:** This ultra-fast power bank also boasts a USB Quick Charge 3.0 port that provides 18W ultimate fast charge for compatible devices.
- **20W USB-C Power Delivery:** The PowerPack-Fold has a USB-C input/output port that offers 20W Power Delivery output.
- **Dual Input & Pass-Through Charging:** This power bank can be recharged through the micro-USB port or the USB-C input/output port and also supports simultaneous pass-through charging to your connected devices.
- **Stylish Design:** The sleek and stylish design aligns perfectly with your devices and adds a touch of style to your desk space. It is also compact enough to be easily portable.
- **Safety Protection:** This charging station has a built-in multi-protect safety system with high-temperature, over-current, and over-charging protection.

## Precautions

Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products.

1. Do not disassemble the backup battery or attempt to fix it.
2. Kindly use the original charging cable provided to charge the product.
3. Do not attempt to replace any part of this Backup battery or battery inside.
4. Do not crush, puncture, dispose of in fire, short the contacts or expose the battery to water or other liquids.
5. Do not connect input and output in reverse.
6. Do not store or use the battery in a high-temperature environment, including intense sunlight or heat.
7. Avoid drops, bumps, abrasions, and impacts.
8. If there is any reason to believe that there is damage to the battery, discontinue use immediately.
9. If you find that the battery is too hot, is emitting an odor, is deformed, punctured, or exhibits any suspicious or abnormal behavior, discontinue use immediately and contact our customer service.
10. Always charge this product before extended storage.

## Appearance & Interface Description

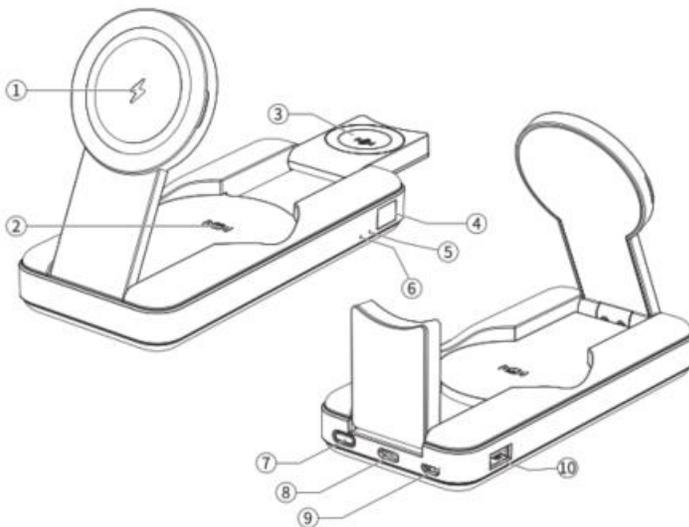

1. Magnetic Wireless Charger (Smart Phone)
2. Wireless Charger (AirPods)
3. Magnetic Wireless Charger (Watch)

4. LCD Battery Level Display
5. Wireless Charging Indicator for Phone
6. Wireless Charging Indicator for Airpods
7. Power Button
8. USB-C Input/Output Port
9. Micro-USB Input
10. USB-A Output

### Operation Instructions:

#### 1. Checking the remaining power left in PowerPack-Fold back-up battery.

- a. To view the remaining power left, press the power button once and view the LED Battery Level Display
- b. PowerPack-Fold will turn off automatically after 25 seconds of non-operation.

#### 2. Charging PowerPack-Fold back-up battery

- Connect one end of the USB-C or Micro-USB Cable to PowerPack-Fold and the other end to a desktop/laptop or a USB Power Adapter.


#### 3. Charging USB chargeable devices using PowerPack-Fold

- Plug the USB cable into the USB-A/USB-C output port on PowerPack-Fold and the other end into the device.

#### 4. Charging Wireless Devices.


##### a) Smart Phone:

- Please place your wireless charging phone as shown below, it will automatically charge your device.

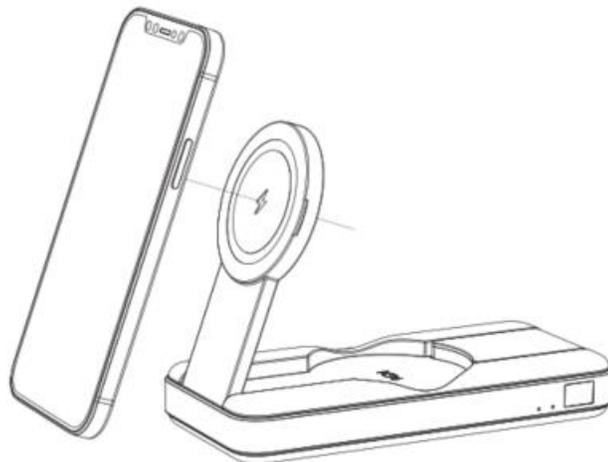


**b) AirPods:**

- Please place your TWS in the charging area and press the switch button.

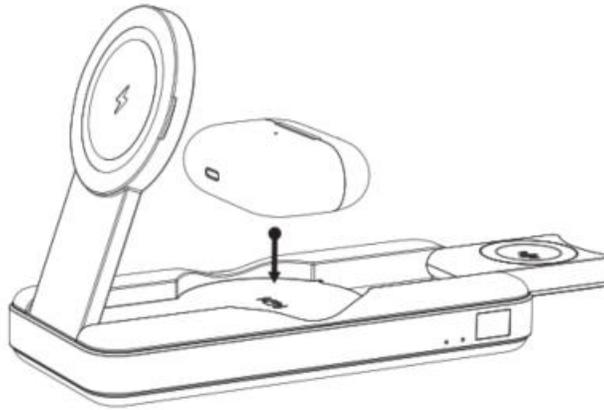

**c) Apple Watch:**

- Place your Apple watch on the magnet of the wireless charger for Apple watch, it will automatically charge your apple watch.

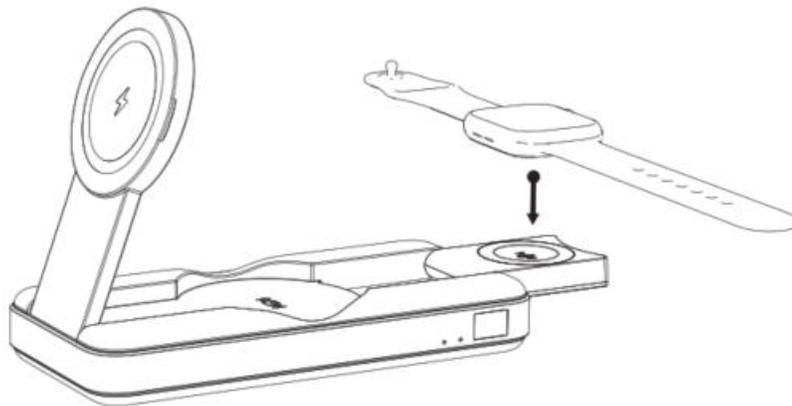

**5. Pass Through Charging**

- When PowerPack-Fold is connected to a power source, it can simultaneously charge the Power Bank while charging your wireless devices at the same time.